


JOB NAME	ITEM NO.
----------	----------

SUBMITTED AS SHOWN	
SUBMITTED AS NOTED	

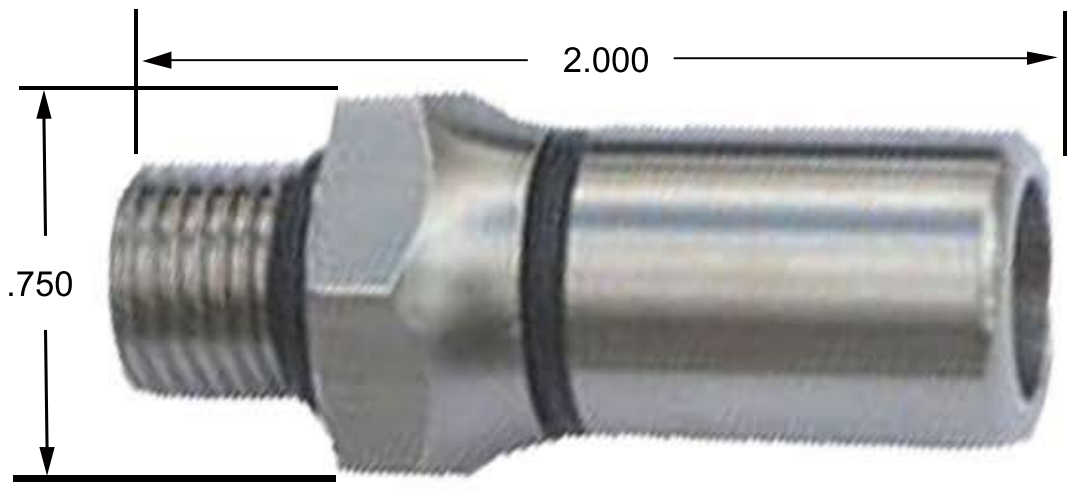

DIMENSIONS IN INCHES

Specifications	SPECIFICATION MANUAL
<ul style="list-style-type: none"> <li>① FCS™ Patented Stainless Steel Non-Clogging Nozzle</li> <li>② Max Flow Rate 1.8 gpm from 30-80 psi</li> <li>③ Threads: 9/16"-18 NPS Male</li> <li>④ All Metal Construction; Brass and Stainless Steel; Double Nickel Plated</li> <li>⑤ For Use in Bradley and Other Shower Fixtures Requiring 9/16"-18 NPS Male Threads</li> <li>⑥ Vandal and Ligature Resistant</li> <li>⑦ O'Ring: EPDM</li> <li>⑧ Certifications: A112.18.1 and WaterSense</li> </ul>	